


6P05 10 BAR OIL SUCTION & DELIVERY

Oil / fuel hose assembly suitable for transfer mediums with upto 55% aromatics content

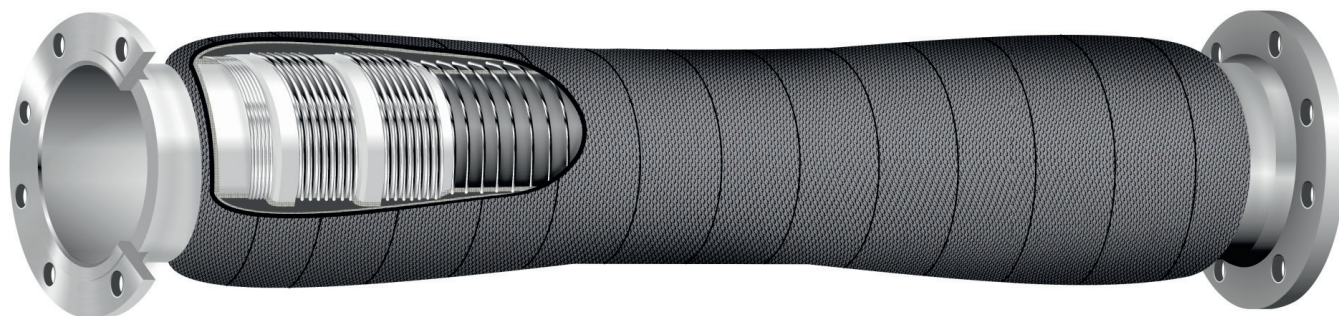

Temperature range:	-30°C. +90°C.
Electrical continuity:	Continuous embedded copper wires, R10 6TH OHM / M.
Lining:	Black nitrile rubber (NBR) – 55% Aromatics.
Reinforcement:	High tenacity polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion & weather resistant.
Brand:	As per customer requirements.
Ends:	Vulcanized built in hose tails with flanges.
Options:	See page 214 for fitting options.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Test pressure	Vacuum pressure	Min. bend. radius	Hose weight	Assy weight	Max. avail. length
Nº	mm	mm	mm	bar	bar	bar	bar	mm	kg/m	kg/10m	m
6P05-051	51	67.3	8.1	10	30	15	-0.85	300	2	31	61
6P05-076	76	94.8	9.4	10	30	15	-0.85	450	4	55	61
6P05-102	102	122.1	10.1	10	30	15	-0.85	610	5	76	61
6P05-127	127	150.9	11.9	10	30	15	-0.85	760	8	123	61
6P05-152	152	178.9	13.4	10	30	15	-0.85	910	11	162	61
6P05-203	203	232.4	14.7	10	30	15	-0.85	1210	16	239	61
6P05-254	254	286.2	16.1	10	30	15	-0.85	1520	22	328	12
6P05-305	305	340.8	17.9	10	30	15	-0.85	1830	29	446	12

Norms: ISO 1307