


4F05U 10 BAR SPIRITS SUCTION & DELIVERY

Suction and delivery hose with very low permeability lining for transport of high alcohol or sparkling beverages

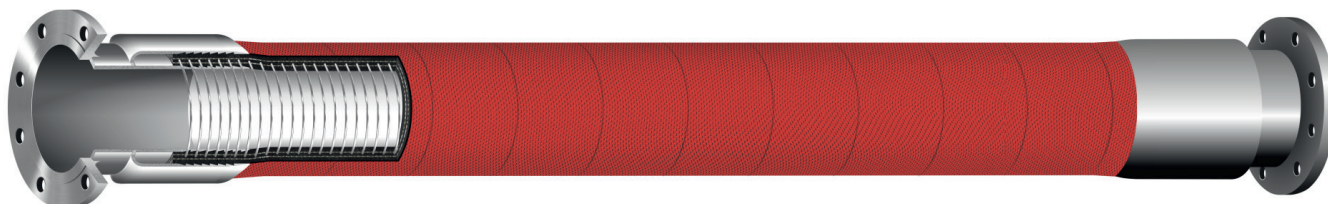

Temperature range:	-30°C. +100°C. suitable for steam cleaning at 130 degC for up to 20 minutes
Electrical continuity:	N/A.
Lining:	White butyl / EPDM blend, low permeability, non-toxic, non-tainting. FDA 177.2600 compliant.
Reinforcement:	High tenacity polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Red smooth synthetic rubber (SBR). Abrasion / weather resistant.
Brand:	As per customer requirements.
Ends:	Stainless steel swaged hose tails with flanges.
Options:	See page 214 for fitting options.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Test pressure	Vacuum pressure	Min. bend. radius	Hose weight	Assy weight	Max. avail. length
Nº	mm	mm	mm	bar	bar	bar	bar	mm	kg/m	kg/10m	m
4F05U-102	102	122.1	10.1	10	30	15	-0.85	610	5	76	61
4F05U-127	127	150.9	11.9	10	30	15	-0.85	760	8	123	61
4F05U-152	152	178.9	13.4	10	30	15	-0.85	910	11	162	61
4F05U-203	203	232.4	14.7	10	30	15	-0.85	1210	17	246	40

Norms: ISO 1307, EG1935/2004, EG2023/2006,