2W05E 10 BAR MULTIPURPOSE / HOT WATER WATER SUCTION & DELIVERY

Multipurpose hose for wide range of water transport applications. Including hot water

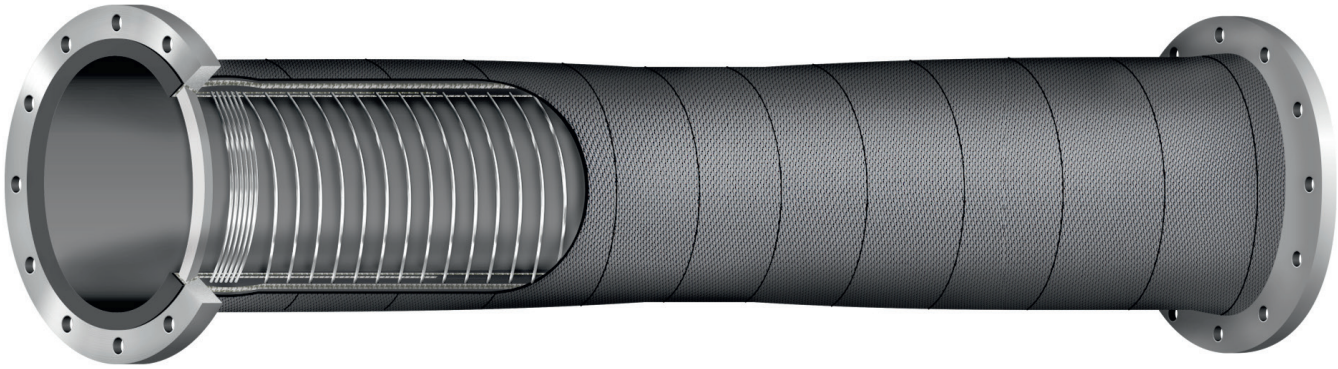

Temperature range:	-40°C. +120°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (EPDM).
Reinforcement:	High tenacity polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black synthetic rubber (EPDM).
Brand:	As per customer requirments.
Ends:	Vulcanized Integral Type (Fixed) Flanges
Options:	See page 214 for fitting options.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Test pressure	Vacuum pressure	Min. bend. radius	Hose weight	Assy weigth	Max. avail. length
№	mm	mm	mm	bar	bar	bar	bar	mm	kg/m	kg/10m	m
2W05E-203	203	231.6	14.3	10	30	15	-0.85	1210	18	207	40
2W05E-254	254	281.1	13.6	10	30	15	-0.85	1520	20	234	12
2W05E-305	305	334.8	14.9	10	30	15	-0.85	1830	26	311	12
2W05E-356	356	402.4	23.2	10	30	15	-0.85	2130	48	546	12
2W05E-406	406	454.8	24.4	10	30	15	-0.85	2430	57	654	12
2W05E-456	456	515.1	29.6	10	30	15	-0.85	2730	86	987	12
2W05E-508	508	576.1	34.1	10	30	15	-0.85	3040	107	1229	12
2W05E-610	610	677.5	33.7	10	30	15	-0.85	3660	130	1489	12

Norms: ISO 1307