


2W55P 10 BAR POTABLE WATER DELIVERY

Potable water hose assembly.

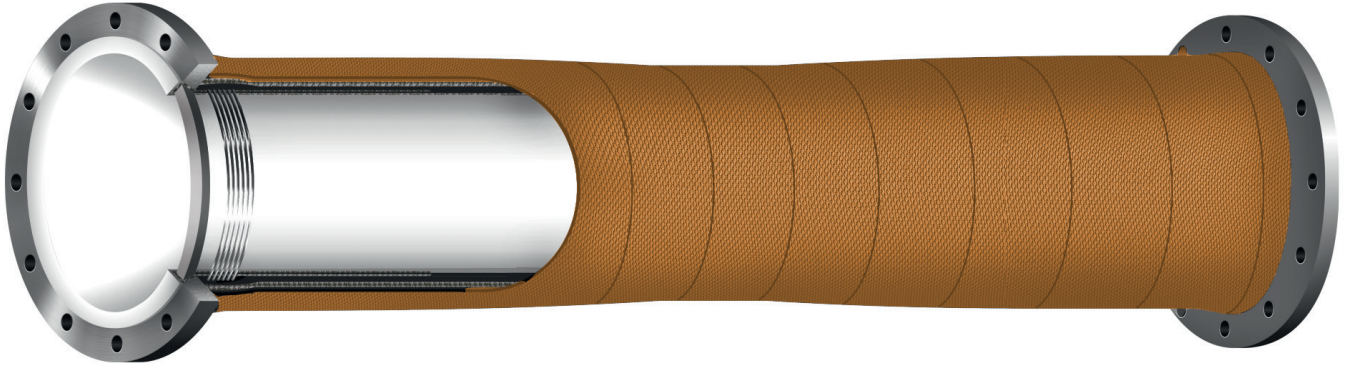

Temperature range:	-30°C. +80°C.
Electrical continuity:	N/A.
Lining:	White natural rubber (NR), non-toxic, non-tainting. FDA 177:2600 compliant.
Reinforcement:	High tenacity polyester tyre cord.
Cover:	Black smooth synthetic rubber (EPDM).
Brand:	As per customer requirements.
Ends:	Vulcanized beaded type (swivel) flanges.
Options:	See page 214 for fitting options.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Test pressure	Vacuum pressure	Min. bend. radius	Hose weight	Assy weight	Max. avail. length
Nº	mm	mm	mm	bar	bar	bar	bar	mm	kg/m	kg/10m	m
2W55P-203	203	225.2	11.1	10	30	15	-0.85	1210	11	129	61
2W55P-254	254	275.0	10.5	10	30	15	-0.85	1520	12	148	12
2W55P-305	305	327.2	11.1	10	30	15	-0.85	1830	15	186	12
2W55P-356	356	392.0	18.0	10	30	15	-0.85	2130	30	348	12

Norms: ISO 1307