
Air & gas

1A04 20 BAR COMPRESSED AIR SUCTION & DELIVERY.

Heavy duty compressed air hose for use in heavy industry, plant hire, mining and construction. Kink resistant.

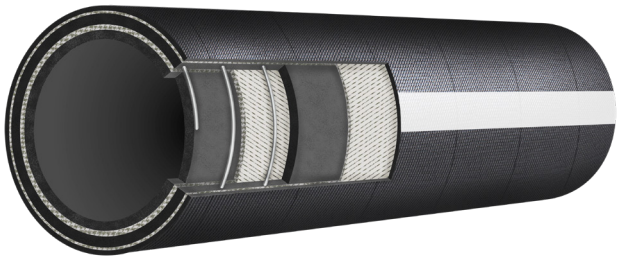

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tenacity polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	NBR liner available on request.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
1A04-019	19	30.9	5.9	20	60	120	0.76	61
1A04-025	25	37.5	6.2	20	60	150	0.97	61
1A04-032	32	45.7	6.8	20	60	200	1.32	61
1A04-038	38	51.7	6.8	20	60	230	1.52	61
1A04-051	51	65.1	7.0	20	60	310	1.98	61
1A04-063	63	78.4	7.7	20	60	380	2.77	61
1A04-076	76	93.6	8.8	20	60	460	3.70	61
1A04-102	102	122.9	10.5	20	60	620	5.73	61
1A04-127	127	150.9	11.9	20	60	770	8.90	61
1A04-152	152	180.1	14.0	20	60	920	11.90	61

Notes: See page XX for hose assemblies