
1A54 20BAR COMPRESSED AIR DELIVERY.

Heavy duty compressed air hose for use in heavy industry, plant hire, mining and construction. Kink resistant.

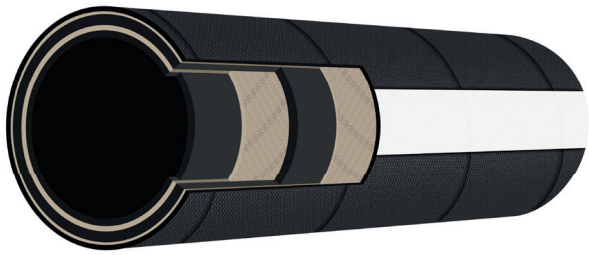

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	NBR liner available on request.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
1A54-019	19	28.2	4.6	20	60	-	0.50	61
1A54-025	25	34.8	4.9	20	60	-	0.65	61
1A54-032	32	43.0	5.5	20	60	-	0.92	61
1A54-038	38	49.0	5.5	20	60	-	1.06	61
1A54-051	51	62.4	5.7	20	60	-	1.40	61
1A54-063	63	74.4	5.7	20	60	-	1.70	61
1A54-076	76	89.6	6.8	20	60	-	2.41	61
1A54-102	102	118.8	8.4	20	60	-	3.89	61
1A54-127	127	143.8	8.4	20	60	-	4.77	61
1A54-152	152	173.0	10.5	20	60	-	6.95	61

Norms: ISO1307