
1A55 10BAR COMPRESSED AIR DELIVERY.

Heavy duty compressed air hose for use in heavy industry, plant hire, mining and construction. Kink resistant.

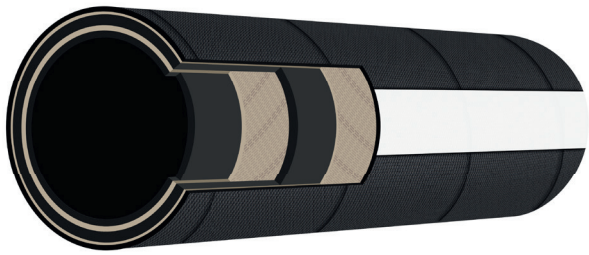

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	EPDM or NBR liner available on request.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
1A55-019	19	28.2	4.6	10	30	-	0.50	61
1A55-025	25	34.2	4.6	10	30	-	0.62	61
1A55-032	32	42.4	5.2	10	30	-	0.89	61
1A55-038	38	48.4	5.2	10	30	-	1.03	61
1A55-051	51	62.0	5.5	10	30	-	1.38	61
1A55-063	63	74.0	5.5	10	30	-	1.67	61
1A55-076	76	87.0	5.5	10	30	-	1.98	61
1A55-102	102	115.8	6.9	10	30	-	3.28	61
1A55-127	127	140.8	6.9	10	30	-	4.04	61
1A55-152	152	169.2	8.6	10	30	-	5.94	61

Norms: ISO1307