
1A58 16BAR COMPRESSED AIR DELIVERY.

Heavy duty compressed air hose for use in heavy industry, plant hire, mining and construction. Kink resistant.

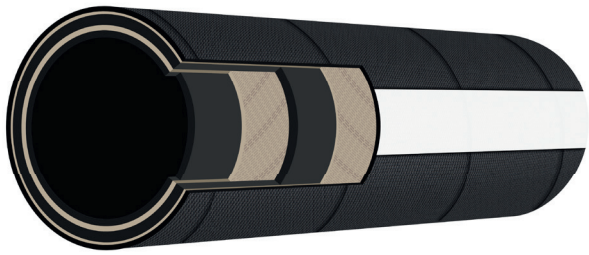

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	16 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	NBR liner available on request.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
1A58-019	19	28.2	4.6	16	48	-	0.50	61
1A58-025	25	34.2	4.6	16	48	-	0.62	61
1A58-032	32	43.0	5.5	16	48	-	0.92	61
1A58-038	38	49.0	5.5	16	48	-	1.06	61
1A58-051	51	62.0	5.5	16	48	-	1.38	61
1A58-063	63	74.4	5.7	16	48	-	1.70	61
1A58-076	76	87.4	5.7	16	48	-	2.02	61
1A58-102	102	118.0	8.0	16	48	-	3.80	61
1A58-127	127	143.8	8.4	16	48	-	4.77	61
1A58-152	152	170.0	9.0	16	48	-	6.07	61

Norms: ISO1307