
CH97 25BAR LPG SUCTION & DELIVERY.

Flexible hose for the suction and delivery of liquefied petroleum gas, LPG and natural gas, with pin-pricked cover. According to EN 1762:2017.

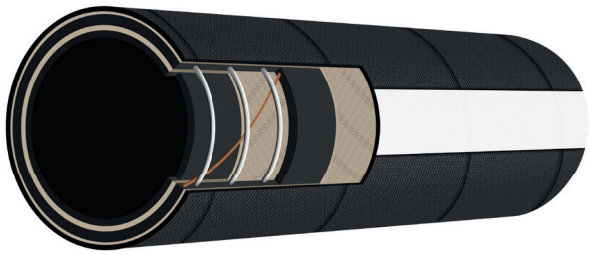

Temperature range:	-30°C +80°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - suitable for LPG.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	25 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
CH97-51	51	78.0	13.5	25	100	310	3.45	61
CH97-76	76	103.4	13.7	25	100	460	4.34	61
CH97-102	102	137.0	17.5	25	100	620	9.66	61
CH97-152	152	190.0	19.0	25	100	920	14.60	61

Norms: ISO1307