
Bunkering

BM10H 10BAR HEAVY DUTY BULK CEMENT SUCTION & DELIVERY.

Heavy duty marine bunkering suction & delivery hose for bulk cement, barite, bentonite and other bulk products.

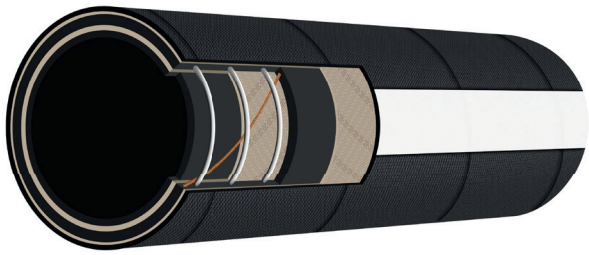

Temperature range:	-30°C +80°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black natural rubber (NR), high abrasion resistance. 60 Shore.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
BM10H-076	76	99.6	11.8	10	40	460	4.56	61
BM10H-102	102	128.2	13.1	10	40	620	6.77	61
BM10H-127	127	155.7	14.3	10	40	770	9.78	61
BM10H-152	152	181.9	14.9	10	40	920	11.90	61

Norms: ISO1307