
Bunkering

BM20S 20BAR HEAVY DUTY BULK CEMENT DELIVERY.

Heavy duty marine bunkering delivery hose for bulk cement, barite, bentonite and other bulk products.

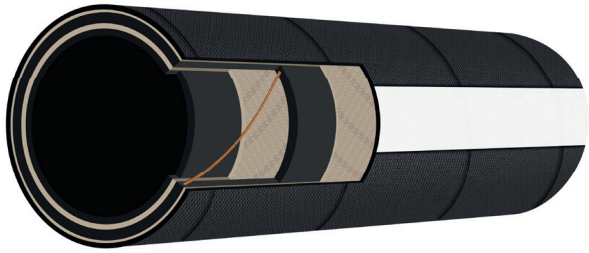

Temperature range:	-30°C +80°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black natural rubber (NR), high abrasion resistance. 60 Shore.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 4:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
BM20S-076	76	97.6	10.8	20	80	-	3.57	61
BM20S-102	102	127.4	12.7	20	80	-	5.54	61
BM20S-127	127	152.8	12.9	20	80	-	6.79	61
BM20S-152	152	182.0	15.0	20	80	-	9.30	61

Norms: ISO1307