
Bunkering

CU16HU 16BAR HEAVY DUTY UHMWPE CHEMICAL SUCTION & DELIVERY.

Heavy duty marine bunkering suction & delivery hose with UHMWPE lining for excellent resistance to most common chemicals. Always consult chemical resistance tables to ensure compatibility with the application.

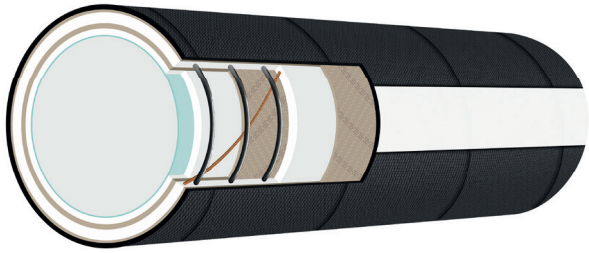

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Neutral coloured polyethylene (UHMWPE), plus an EPDM backing layer.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	16 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
CU16HU-051	51	65.8	7.4	16	64	310	1.98	61
CU16HU-076	76	93.6	8.8	16	64	460	3.33	61
CU16HU-102	102	121.4	9.7	16	64	620	4.97	61
CU16HU-127	127	151.3	12.2	16	64	770	8.17	61
CU16HU-152	152	178.6	13.3	16	64	920	10.91	61

Norms: ISO1307