
Bunkering

DO10H 10BAR HEAVY DUTY OIL / FUEL / MUD / MEG SUCTION & DELIVERY.

Heavy duty marine bunkering suction & delivery hose for gasoline, diesel oil, fuel oil with aromatic content up to 50% also applicable for seawater, fresh water, mud, air and other general purposes.

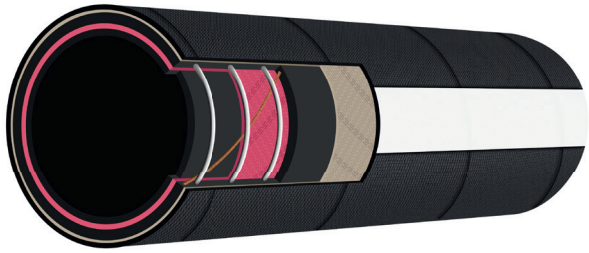

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
DO10H-051	51	65.9	7.4	10	40	310	1.98	61
DO10H-076	76	94.0	9.0	10	40	460	3.73	61
DO10H-102	102	123.6	10.8	10	40	620	6.01	61
DO10H-127	127	150.9	11.9	10	40	770	8.43	61
DO10H-152	152	177.1	12.5	10	40	920	10.39	61

Norms: ISO1307