


DO10S 10BAR HEAVY DUTY OIL / FUEL / MUD / MEG DELIVERY.

Heavy duty marine bunkering delivery hose for gasoline, diesel oil, fuel oil with aromatic content up to 50% also applicable for seawater, fresh water, mud, air and other general purposes.

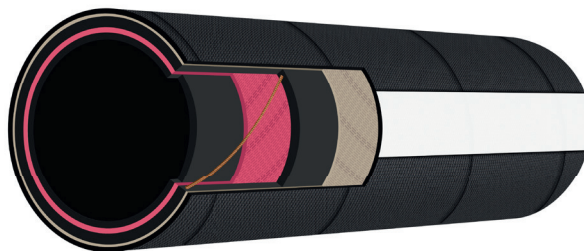

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 4:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.

Options:

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
Nº	mm	mm	mm	bar	bar	mm	kg/m	m
DO10S-051	51	65.8	7.4	10	40	-	1.82	61
DO10S-076	76	92.0	8.0	10	40	-	2.71	61
DO10S-102	102	118.4	8.2	10	40	-	3.61	61
DO10S-127	127	145.0	9.0	10	40	-	4.82	61
DO10S-152	152	171.2	9.6	10	40	-	6.17	61

Norms: ISO1307