
Bunkering

DO20H 20BAR HEAVY DUTY OIL / FUEL / MUD / MEG SUCTION & DELIVERY.

Heavy duty marine bunkering suction & delivery hose for gasoline, diesel oil, fuel oil with aromatic content up to 50% also applicable for seawater, fresh water, mud, air and other general purposes.

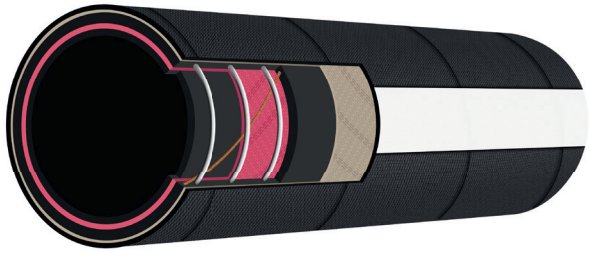

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
DO20H-051	51	70.1	9.5	20	80	310	2.55	61
DO20H-076	76	95.6	9.8	20	80	460	3.80	61
DO20H-102	102	126.5	12.2	20	80	620	6.49	61
DO20H-127	127	153.9	13.4	20	80	770	9.27	61
DO20H-152	152	183.1	15.5	20	80	920	12.28	61

Norms: ISO1307