


DO40S 40BAR HIGH PRESSURE OIL / FUEL / MUD / MEG DELIVERY.

High pressure marine bunkering delivery hose for gasoline, diesel oil, fuel oil with aromatic content up to 50% also applicable for seawater, fresh water, mud, air and other general purposes.

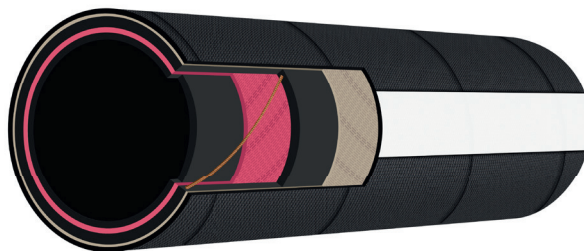

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	40 Bar. 4:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.

Options:

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
Nº	mm	mm	mm	bar	bar	mm	kg/m	m
DO40S-051	51	70.8	9.9	40	160	-	2.34	61
DO40S-076	76	98.8	11.4	40	160	-	3.79	61
DO40S-102	102	127.8	12.9	40	160	-	5.55	61
DO40S-127	127	158.2	15.6	40	160	-	8.31	61
DO40S-152	152	184.4	16.2	40	160	-	10.22	61

Norms: ISO1307