
Bunkering

EP16H 20BAR HEAVY DUTY EPDM CHEMICAL SUCTION & DELIVERY.

Heavy duty marine bunkering suction & delivery hose with EPDM lining for excellent resistance to many common chemicals. Always consult chemical resistance tables to ensure compatibility with the application.

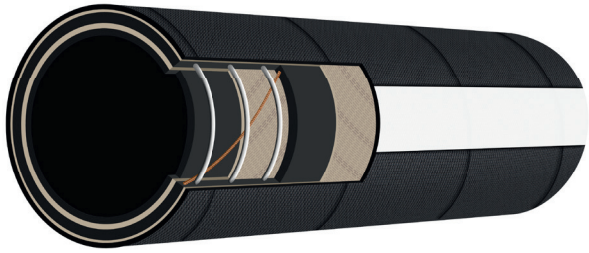

Temperature range:	-30°C +120°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black synthetic rubber (EPDM).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	16 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
EP16H-051	51	66.0	7.5	16	64	310	1.92	61
EP16H-076	76	93.8	8.9	16	64	460	3.56	61
EP16H-102	102	121.9	9.9	16	64	620	5.18	61
EP16H-127	127	149.7	11.3	16	64	770	7.85	61
EP16H-152	152	179.3	13.6	16	64	920	10.94	61

Norms: ISO1307