
Bunkering

EP16S 20BAR HEAVY DUTY EPDM CHEMICAL DELIVERY.

Heavy duty marine bunkering delivery hose with EPDM lining for excellent resistance to many common chemicals. Always consult chemical resistance tables to ensure compatibility with the application.

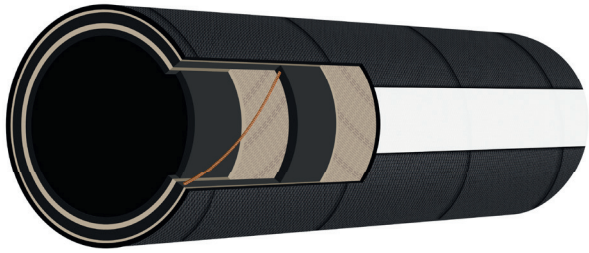

Temperature range:	-30°C +120°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black synthetic rubber (EPDM).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	16 Bar. 4:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
EP16S-051	51	64.6	6.8	16	64	-	1.59	61
EP16S-076	76	90.8	7.4	16	64	-	2.48	61
EP16S-102	102	118.8	8.4	16	64	-	3.65	61
EP16S-127	127	143.8	8.4	16	64	-	4.46	61
EP16S-152	152	173.4	10.7	16	64	-	6.89	61

Norms: ISO1307