
Bunkering

PW10H 10BAR HEAVY DUTY POTABLE WATER SUCTION & DELIVERY.

Heavy duty marine bunkering suction & delivery hose for potable & fresh water. FDA approved.

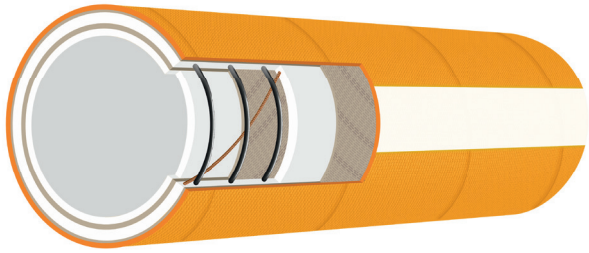

Temperature range:	-30°C +80°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	White natural rubber (NR), non-toxic, non-tainting. FDA 177:2600 compliant.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Orange smooth synthetic rubber (EPDM). Chemical / weather resistant.
Working pressure:	10 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
PW10H-051	51	68.5	8.7	10	40	310	2.38	61
PW10H-076	76	94.8	9.4	10	40	460	3.83	61
PW10H-102	102	123.4	10.7	10	40	620	5.84	61
PW10H-127	127	152.1	12.5	10	40	770	9.05	61
PW10H-152	152	178.3	13.1	10	40	920	11.11	61

Norms: ISO1307