
Bunkering

PW10S 10BAR HEAVY DUTY POTABLE WATER DELIVERY.

Heavy duty marine bunkering delivery hose for potable & fresh water. FDA approved.

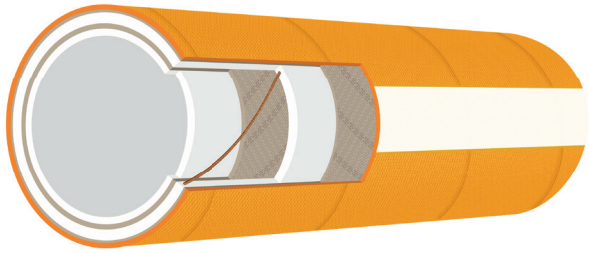

Temperature range:	-30°C +80°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	White natural rubber (NR), non-toxic, non-tainting. FDA 177:2600 compliant.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Orange smooth synthetic rubber (EPDM). Chemical / weather resistant.
Working pressure:	10 Bar. 4:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
PW10S-051	51	67.0	8.0	10	40	-	2.05	61
PW10S-076	76	94.4	9.2	10	40	-	3.28	61
PW10S-102	102	120.4	9.2	10	40	-	4.28	61
PW10S-127	127	145.4	9.2	10	40	-	5.27	61
PW10S-152	152	172.4	10.2	10	40	-	6.76	61

Norms: ISO1307