
Bunkering

PW20S 20BAR HEAVY DUTY POTABLE WATER DELIVERY.

Heavy duty marine bunkering delivery hose for potable & fresh water. FDA approved.

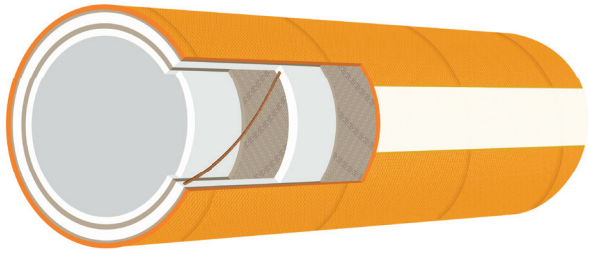

Temperature range:	-30°C +80°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	White natural rubber (NR), non-toxic, non-tainting. FDA 177:2600 compliant.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Orange smooth synthetic rubber (EPDM). Chemical / weather resistant.
Working pressure:	20 Bar. 4:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
PW20S-051	51	68.2	8.6	20	80	-	2.15	61
PW20S-076	76	95.2	9.6	20	80	-	3.55	61
PW20S-102	102	124.2	11.1	20	80	-	5.01	61
PW20S-127	127	149.2	11.1	20	80	-	6.10	61
PW20S-152	152	176.6	12.3	20	80	-	8.45	61

Norms: ISO1307