
5C08HC 16BAR CSM LINED CHEMICAL SUCTION & DELIVERY.

Suction and delivery hose with CSM lining designed to handle a wide range of highly corrosive chemicals. Chemical resistance tables should always be consulted to ensure the compatibility of the hose with the application.

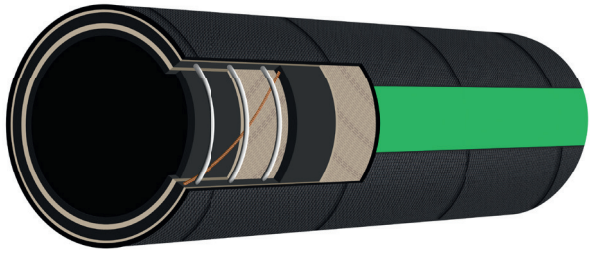

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R<10 6th Ohm M. - Type M
Lining:	Black synthetic rubber chlorosulfonated polyethylene. Acid resistant.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth synthetic rubber (EPDM). Chemical & weather resistant.
Working pressure:	16 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	Green Stripe
Ends:	Plain ends.
Options:	Available with CR cover on request

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
5C08HC-019	19	32.1	6.5	16	64	120	0.84	61
5C08HC-025	25	38.7	6.8	16	64	150	1.07	61
5C08HC-032	32	45.7	6.8	16	64	200	1.30	61
5C08HC-038	38	51.7	6.8	16	64	230	1.49	61
5C08HC-051	51	65.1	7.0	16	64	310	1.95	61
5C08HC-063	63	79.6	8.3	16	64	380	2.94	61
5C08HC-076	76	96.0	10.0	16	64	460	4.17	61
5C08HC-089	89	109.2	10.1	16	64	540	5.05	61
5C08HC-102	102	123.0	10.5	16	64	620	5.81	61

Norms: ISO 1307, EN12115:2019

technical specifications are subject to change. Always request a current data sheet which is available from your suppler.