
5C08VC 16BAR FKM LINED CHEMICAL SUCTION & DELIVERY.

Suction and delivery hose with FKM lining designed to handle a wide range of highly corrosive chemicals. Chemical resistance tables should always be consulted to ensure the compatibility of the hose with the application.

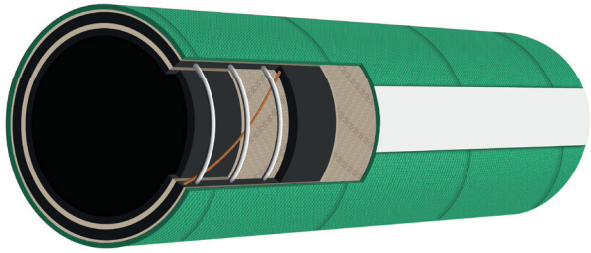

Temperature range:	-30°C +90°C.
Electrical continuity:	Continuous, embedded copper wire R<10 6th Ohm M. - Type M
Lining:	Black synthetic rubber and fluoropolymer (FKM).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Green smooth synthetic rubber (EPDM). Chemical & weather resistant
Working pressure:	16 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	White stripe
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
5C08VC-019	19	33.9	7.4	16	64	120	0.99	61
5C08VC-025	25	39.9	7.4	16	64	150	1.21	61
5C08VC-032	32	46.9	7.4	16	64	200	1.48	61
5C08VC-038	38	52.9	7.4	16	64	230	1.70	61
5C08VC-051	51	66.3	7.6	16	64	310	2.21	61
5C08VC-063	63	80.8	8.9	16	64	380	3.26	61
5C08VC-076	76	96.0	10.0	16	64	460	4.26	61
5C08VC-102	102	123.0	10.5	16	64	620	5.94	61

Norms: ISO 1307, EN12115:2019

technical specifications are subject to change. Always request a current data sheet which is available from your suppler.