
5C58C 16BAR EPDM CHEMICAL DELIVERY.

Softwall delivery hose designed to handle a wide range of medium duty chemicals and acids. Chemical resistance tables should always be consulted to ensure the compatibility of the hose with the application.

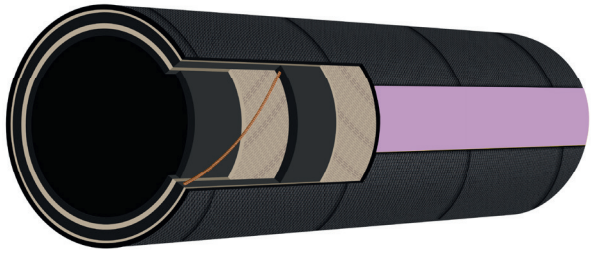

Temperature range:	-30°C +120°C.
Electrical continuity:	Continuous, embedded copper wire R<10 6th Ohm M. - Type M
Lining:	Black synthetic rubber (EPDM). Acid resistant.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth synthetic rubber (EPDM). Chemical & weather resistant
Working pressure:	16 Bar. 4:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	Lilac stripe for EPDM
Ends:	Plain ends.
Options:	Available with CR cover on request

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
5C58C-019	19	29.2	5.1	16	64	-	0.50	61
5C58C-025	25	36.0	5.5	16	64	-	0.70	61
5C58C-032	32	43.4	5.7	16	64	-	0.87	61
5C58C-038	38	49.4	5.7	16	64	-	1.01	61
5C58C-051	51	62.4	5.7	16	64	-	1.30	61
5C58C-063	63	75.6	6.3	16	64	-	1.76	61
5C58C-076	76	88.6	6.3	16	64	-	2.09	61
5C58C-080	80	92.6	6.3	16	64	-	2.19	61
5C58C-102	102	117.6	7.8	16	64	-	3.34	61

Norms: ISO 1307, EN12115:2019

technical specifications are subject to change. Always request a current data sheet which is available from your suppler.