
Food grade

4F05-B 10BAR BEER / WINE SUCTION & DELIVERY.

Suction & Delivery hose for BEER / WINE and other beverage fluids - meets the requirements of EG1935/2004, EC 2023/2006, FDA 21 CFR 177.2600 requirements.

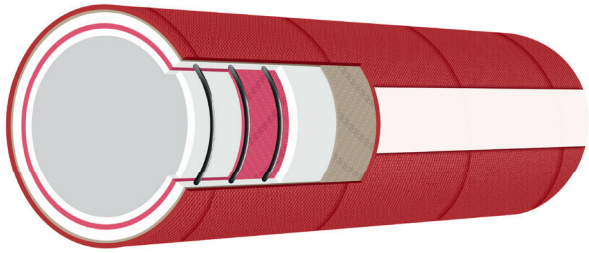

Temperature range:	-30°C +90°C. Suitable for steam cleaning, max. 130°C.
Electrical continuity:	N/A.
Lining:	White nitrile rubber (NBR), non-toxic, non-tainting. FDA 177:2600 compliant.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Red smooth synthetic rubber (EPDM). Abrasion / weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
4F05-B-019	19	32.1	6.5	10	30	120	0.82	61
4F05-B-025	25	38.1	6.5	10	30	150	1.01	61
4F05-B-032	32	45.1	6.5	10	30	200	1.24	61
4F05-B-038	38	51.7	6.8	10	30	230	1.45	61
4F05-B-051	51	67.6	8.3	10	30	310	2.40	61
4F05-B-063	63	79.3	8.2	10	30	380	2.91	61
4F05-B-076	76	93.8	8.9	10	30	460	3.64	61
4F05-B-080	80	98.4	9.2	10	30	480	4.25	61
4F05-B-102	102	121.1	9.6	10	30	620	5.19	61

Norms: ISO 1307, EG1935/2004, EG2023/2015