
Food grade

4F05-U 10BAR SPIRIT SUCTION & DELIVERY - UHMWPE LINED.

Rubber brewers hose which meets the requirements of EC 1935/2004, EC 2023/2006 and FDA 21 CFR 177.2600 - suitable for applications within the brewery, winery, beverage, healthcare and pharmaceutical industries. Kink and crush resistant.

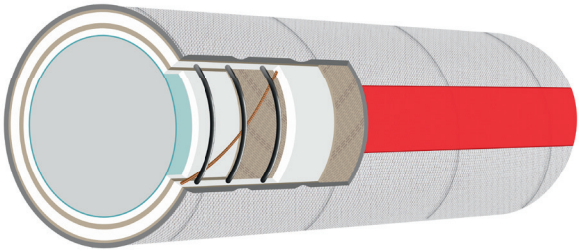

Temperature range:	-30°C +100°C. Suitable for steam cleaning at 110 degC for up to 20 minutes
Electrical continuity:	N/A.
Lining:	Clear food grade ultra high molecular weight polyethylene (UHMWPE) plus an white EPDM backing layer.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Grey smooth synthetic rubber (EPDM). Abrasion / weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
4F05-U-019	19	31.7	6.3	10	30	120	0.79	61
4F05-U-025	25	37.7	6.3	10	30	150	0.97	61
4F05-U-032	32	44.7	6.3	10	30	200	1.18	61
4F05-U-038	38	51.3	6.6	10	30	230	1.39	61
4F05-U-051	51	68.4	8.7	10	30	310	2.50	61
4F05-U-063	63	80.1	8.6	10	30	380	3.04	61
4F05-U-076	76	94.6	9.3	10	30	460	3.78	61
4F05-U-080	80	94.6	7.3	10	30	480	3.78	61
4F05-U-102	102	120.7	9.4	10	30	620	5.05	61

Norms: ISO 1307, EG1935/2004, EG2023/2006