
Food grade

4M05 10BAR BULK FOOD SUCTION & DELIVERY.

Suction & delivery hose for dry bulk materials such as grains, flour, sugar, beans, dry pharmaceuticals, and food starch. Meets the requirements of EG1935/2004, EC 2023/2006, FDA 21 CFR 177.2600

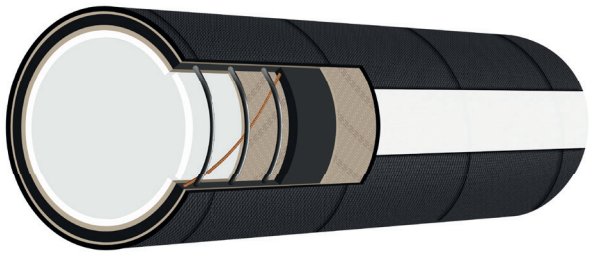

Temperature range:	-30°C +80°C. - Suitable for steam cleaning at 130 degC for up to 20 minutes
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	White natural rubber (NR), non-toxic, non-tainting. FDA 177.600 compliant.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
4M05-051	51	68.7	8.8	10	30	310	2.41	61
4M05-063	63	81.0	9.0	10	30	380	3.27	61
4M05-076	76	95.2	9.6	10	30	460	4.11	61
4M05-102	102	126.2	12.1	10	30	620	7.11	61
4M05-127	127	153.9	13.4	10	30	770	10.13	61
4M05-152	152	178.9	13.4	10	30	920	11.91	61
4M05-203	203	235.6	16.3	10	30	1220	19.02	61

Norms: ISO 1307, EG1935/2004, EG2023/2007