
Food grade

4M55 10BAR BULK FOOD DELIVERY.

Delivery hose for dry bulk materials such as grains, flour, sugar, beans, dry pharmaceuticals, and food starch. Meets the requirements of EG1935/2004, EC 2023/2006, FDA 21 CFR 177.2600

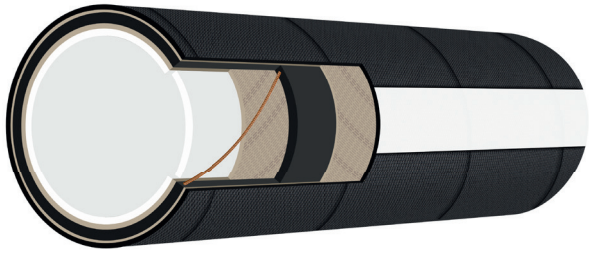

Temperature range:	-30°C +80°C. - Suitable for steam cleaning at 130 degC for up to 20 minutes
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	White natural rubber (NR), non-toxic, non-tainting. FDA 177.600 compliant.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
4M55-051	51	67.2	8.1	10	30	-	2.00	61
4M55-063	63	79.2	8.1	10	30	-	2.50	61
4M55-076	76	93.4	8.7	10	30	-	3.20	61
4M55-102	102	123.0	10.5	10	30	-	5.21	61
4M55-127	127	148.0	10.5	10	30	-	6.37	61
4M55-152	152	173.0	10.5	10	30	-	7.52	61
4M55-203	203	229.4	13.2	10	30	-	12.31	61

Norms: ISO 1307, EG1935/2004, EG2023/2006