
Food grade

4T05-M 10BAR MILK SUCTION AND DELIVERY - EXTRA FLEXIBLE.

Suction & Delivery hose for milk and edible fluids meet tough FDA sanitation requirements. Kink and crush resistant. Flat corrugation for extreme flexibility. Meets the requirements of EG1935/2004, EC 2023/2006, FDA 21 CFR 177.2600

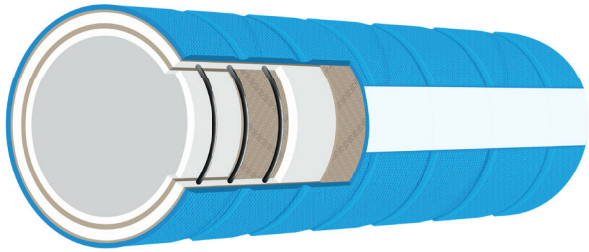

Temperature range:	-30°C +80°C. - Suitable for steam cleaning at 130 degC for up to 20 minutes
Electrical continuity:	N/A.
Lining:	White natural rubber (NR), non-toxic, non-tainting. FDA 177.2600 compliant.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Blue flat corrugated synthetic rubber (EPDM). Abrasion / weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	NBR liner available on request.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
4T05-M-019	19	32.0	6.5	10	30	60	0.79	61
4T05-M-025	25	38.4	6.7	10	30	80	0.97	61
4T05-M-032	32	45.0	6.5	10	30	100	1.19	61
4T05-M-038	38	51.8	6.9	10	30	120	1.52	61
4T05-M-051	51	64.8	6.9	10	30	160	1.95	61
4T05-M-063	63	76.8	6.9	10	30	190	2.35	61
4T05-M-076	76	89.8	6.9	10	30	230	2.78	61
4T05-M-080	80	94.6	7.3	10	30	240	3.25	61
4T05-M-102	102	117.4	7.7	10	30	310	4.00	61

Norms: ISO 1307, EG1935/2004, EG2023/2006