
7M00B 3BAR MATERIALS SUCTION AND DELIVERY - LIGHT AND FLEXIBLE

Light and flexible hose for general transport of materials where ease of movement by operators is important. Suitable for use with vacuum cleaning trucks

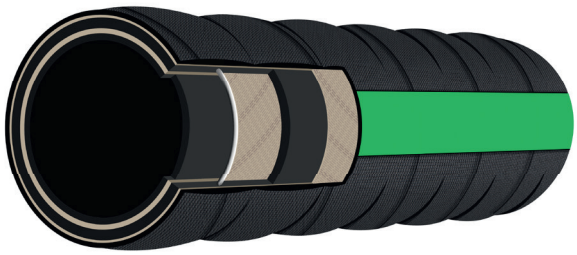

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black natural rubber (NR), high abrasion resistance. 60 Shore.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black heavy corrugated chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	3 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
7M00B-051	51	62.9	5.9	3	9	210	1.63	61
7M00B-076	76	87.9	5.9	3	9	310	2.33	61
7M00B-102	102	114.1	6.1	3	9	410	3.41	61
7M00B-127	127	141.0	7.0	3	9	510	4.54	61
7M00B-152	152	166.0	7.0	3	9	610	5.37	61
7M00B-203	203	217.4	7.2	3	9	820	8.25	61

Norms: ISO1307