
Material handling

7M03B 6BAR MULTIPURPOSE SUCTION AND DELIVERY - EXTRA FLEXIBLE

Medium duty suction & delivery hose for dirty water & fine aggregates.

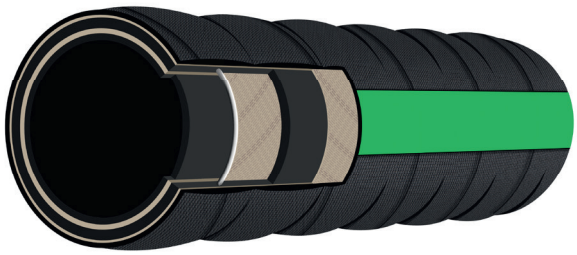

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black natural rubber (NR), high abrasion resistance. 60 Shore.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black corrugated synthetic rubber (SBR). Abrasion / weather resistant.
Working pressure:	6 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
7M03B-076	76	90.0	7.0	6	18	310	2.86	61
7M03B-102	102	117.6	7.8	6	18	410	4.70	61
7M03B-127	127	142.6	7.8	6	18	510	5.75	61
7M03B-152	152	168.8	8.4	6	18	610	7.32	61
7M03B-203	203	220.2	8.6	6	18	820	9.71	61
7M03B-254	254	277.7	11.9	6	18	1020	17.63	12
7M03B-305	305	328.7	11.9	6	18	1220	20.99	12

Norms: ISO1307