
Material handling

7M03C 6BAR MULTIPURPOSE SUCTION AND DELIVERY

Medium duty suction & delivery hose for dirty water & fine aggregates.

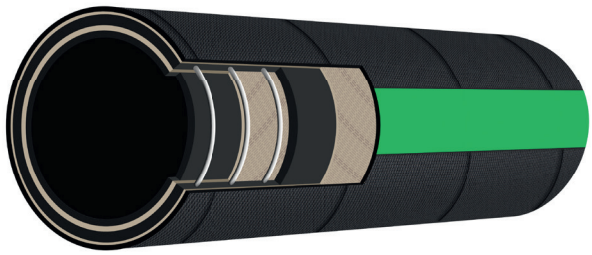

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black natural rubber (NR), high abrasion resistance. 60 Shore.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	6 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
7M03C-051	51	63.8	6.4	6	18	310	1.90	61
7M03C-076	76	90.0	7.0	6	18	460	2.92	61
7M03C-102	102	118.7	8.3	6	18	620	4.78	61
7M03C-127	127	150.0	11.5	6	18	770	8.22	61
7M03C-152	152	173.2	10.6	6	18	920	9.63	61
7M03C-203	203	223.6	10.3	6	18	1220	12.05	61
7M03C-254	254	275.4	10.7	6	18	1530	16.13	12
7M03C-305	305	328.8	11.9	6	18	1830	21.18	12

Norms: ISO1307