
Material handling

7M55SB 12BAR SHOT BLAST HOSE

Shot blast hose with excellent tube quality for conveying highly abrasive media such as quartz sand, steel shot, corundum, glass, etc. Antistatic construction

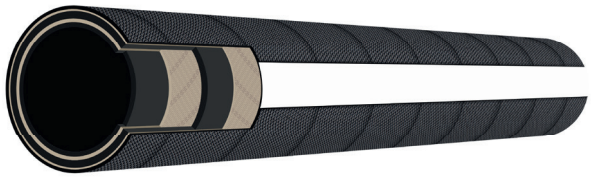

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black natural rubber (NR), high abrasion resistance. 50 Shore.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	12 Bar. 3:1 Safety factor.
Vacuum pressure:	-
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
7M55SB-019	19	32.4	6.7	12	36	-	0.70	61
7M55SB-025	25	39.6	7.3	12	36	-	0.94	61
7M55SB-032	32	47.8	7.9	12	36	-	1.25	61

Norms: ISO1307