
Material handling

7M57C 40BAR GROUT / SCREED / PLASTER DELIVERY.

Heavy duty abrasion resistant hose with kink resistant structure for delivery of plaster, grout or concrete. Both tube and cover materials are antistatic to prevent the build-up of static electrical charges.

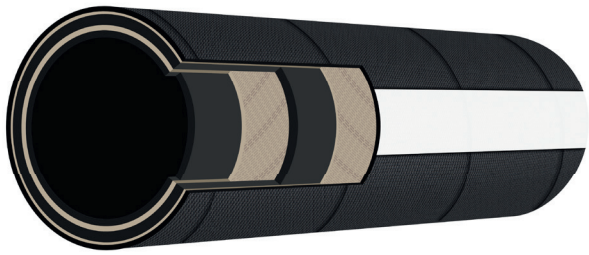

Temperature range:	-35°C +80°C.
Electrical continuity:	N/A.
Lining:	Black natural rubber (NR), high abrasion resistance. 60 Shore.
Reinforcement:	Textile wrapped.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	40 Bar. 2.5:1 Safety factor.
Vacuum pressure:	-
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
7M57C-019	19	32.2	6.6	40	100	-	0.70	61
7M57C-025	25	39.4	7.2	40	100	-	0.94	61
7M57C-032	32	46.4	7.2	40	100	-	1.14	61
7M57C-038	38	54.2	8.1	40	100	-	1.45	61
7M57C-063	63	82.8	9.9	40	100	-	2.79	61
7M57C-076	76	96.4	10.2	40	100	-	3.32	61
7M57C-102	102	125.4	11.7	40	100	-	5.11	61

Norms: ISO1307