
6P04 20BAR HEAVY DUTY OIL / FUEL SUCTION AND DELIVERY

Heavy duty suction and delivery hose for gasoline, diesel, fuel oils with aromatic contents up to 55%, mud, seawater and other general purposes.

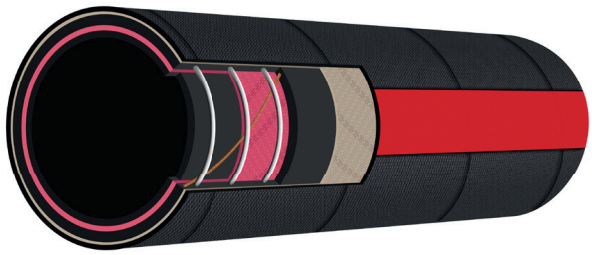

Temperature range:	-30°C +90°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
6P04-025	25	38.7	6.8	20	60	150	1.01	61
6P04-032	32	46.1	7.0	20	60	200	1.25	61
6P04-038	38	52.1	7.0	20	60	230	1.44	61
6P04-051	51	64.3	6.6	20	60	310	1.76	61
6P04-076	76	93.6	8.8	20	60	460	3.48	61
6P04-102	102	121.9	9.9	20	60	620	5.26	61
6P04-127	127	152.7	12.8	20	60	770	9.12	61
6P04-152	152	178.9	13.4	20	60	920	10.97	61
6P04-203	203	239.6	18.3	20	60	1220	20.57	61
6P04-254	254	291.6	18.8	20	60	1530	25.14	12

Norms: ISO1307