
6P04-SD 20BAR MULTIPURPOSE OIL / FUEL SUCTION & DELIVERY.

General purpose suction and delivery hose for gasoline, diesel, fuel oils with aromatic contents up to 55%, mud, seawater and other general purposes.

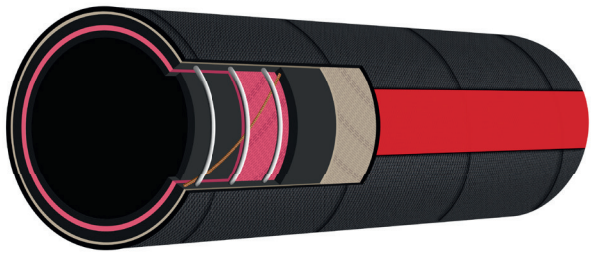

Temperature range:	-30°C +90°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
6P04-SD-051	51	63.2	6.1	20	60	310	1.56	61
6P04-SD-063	63	79.0	8.0	20	60	380	2.68	61
6P04-SD-076	76	92.0	8.0	20	60	460	3.16	61
6P04-SD-102	102	118.6	8.3	20	60	620	4.31	61
6P04-SD-127	127	146.6	9.8	20	60	770	7.11	61
6P04-SD-152	152	174.6	11.3	20	60	920	9.23	61

Norms: ISO1307