
6P05 10BAR HEAVY DUTY OIL / FUEL SUCTION AND DELIVERY

Heavy duty suction and delivery hose for gasoline, diesel, fuel oils with aromatic contents up to 55%, mud, seawater and other general purposes.

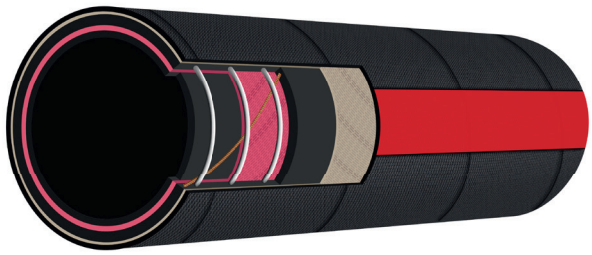

Temperature range:	-30°C +90°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
6P05-025	25	38.2	6.6	10	30	150	0.98	61
6P05-032	32	45.2	6.6	10	30	200	1.19	61
6P05-038	38	51.8	6.9	10	30	230	1.42	61
6P05-051	51	64.8	6.9	10	30	310	1.82	61
6P05-076	76	92.6	8.3	10	30	460	3.33	61
6P05-102	102	120.0	9.0	10	30	620	4.77	61
6P05-127	127	150.2	11.6	10	30	770	8.34	61
6P05-152	152	177.2	12.6	10	30	920	10.44	61
6P05-203	203	233.6	15.3	10	30	1220	16.42	40
6P05-254	254	274.4	10.2	10	30	1530	10.74	12

Norms: ISO1307