
## **6P08** 16BAR HEAVY DUTY OIL / FUEL SUCTION AND DELIVERY

Heavy duty suction and delivery hose for gasoline, diesel, fuel oils with aromatic contents up to 55%, mud, seawater and other general purposes.

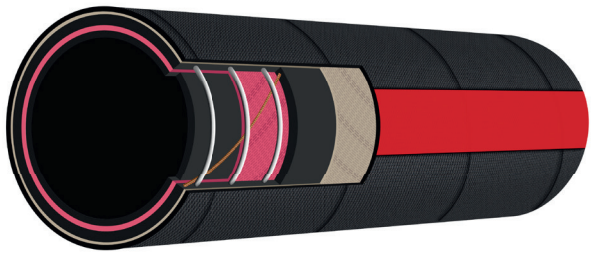

| | |
|---|---|
| **Temperature range:** | -30°C +90°C. |
| **Electrical continuity:** | Continuous, embedded copper wire R10 6th Ohm M. |
| **Lining:** | Black nitrile rubber (NBR) - 55% aromatics. |
| **Reinforcement:** | High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004). |
| **Cover:** | Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant. |
| **Working pressure:** | 16 Bar. 3:1 Safety factor. |
| **Vacuum pressure:** | -0.85 Bar. |
| **Brand:** | As per customer request. |
| **Ends:** | Plain ends. |
| **Options:** | |

| Hose article | Inside diameter | Outside diameter | Wall thickness | Working pressure | Burst pressure | Min. bending radius | Hose weight | Max. available length |
|---|---|---|---|---|---|---|---|---|
| № | mm | mm | mm | bar | bar | mm | kg/m | m |
| 6P08-025 | 25 | 35.7 | 5.3 | 16 | 48 | 150 | 0.79 | 61 |
| 6P08-032 | 32 | 45.7 | 6.8 | 16 | 48 | 200 | 1.23 | 61 |
| 6P08-038 | 38 | 51.7 | 6.8 | 16 | 48 | 230 | 1.42 | 61 |
| 6P08-051 | 51 | 65.1 | 7.0 | 16 | 48 | 310 | 1.85 | 61 |
| 6P08-076 | 76 | 96.4 | 10.2 | 16 | 48 | 460 | 4.02 | 61 |
| 6P08-102 | 102 | 123.0 | 10.5 | 16 | 48 | 620 | 5.55 | 61 |
| 6P08-127 | 127 | 150.9 | 11.9 | 16 | 48 | 770 | 8.48 | 61 |
| 6P08-152 | 152 | 175.9 | 11.9 | 16 | 48 | 920 | 9.99 | 61 |
| 6P08-203 | 203 | 230.9 | 14.0 | 16 | 48 | 1220 | 14.57 | 61 |
| 6P08-254 | 254 | 288.8 | 17.4 | 16 | 48 | 1530 | 24.37 | 12 |

**Norms:** ISO1307