
6P28Z 28BAR FRACKING DELIVERY

Heavy duty oilfield fracking delivery hose for brine, mild chemicals, fracking fluids, drilling mud, petroleum waste, slurries and water. Abrasion resistant UHMWPE cover allows for smooth movement of the hose over rough areas and protects against damage.

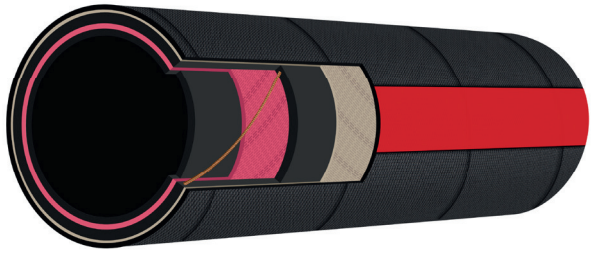

Temperature range:	-30°C +90°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Clear UHMWPE over Black EPDM
Working pressure:	28 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
6P28Z-102	102	120.8	9.4	28	84	-	4.77	61

Norms: ISO1307