
6P54 20BAR HEAVY DUTY OIL / FUEL DLIVERY

Heavy duty delivery hose for gasoline, diesel, fuel oils with aromatic contents up to 55%, mud, seawater and other general purposes.

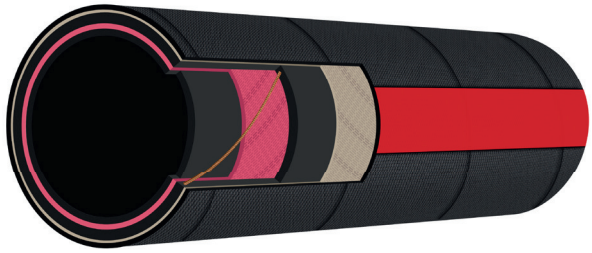

Temperature range:	-30°C +90°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
6P54-025	25	38.4	6.7	20	60	-	0.88	61
6P54-032	32	45.4	6.7	20	60	-	1.07	61
6P54-038	38	51.4	6.7	20	60	-	1.23	61
6P54-051	51	66.0	7.5	20	60	-	1.79	61
6P54-076	76	93.2	8.6	20	60	-	2.94	61
6P54-102	102	120.0	9.0	20	60	-	3.94	61
6P54-127	127	147.4	10.2	20	60	-	5.54	61
6P54-152	152	175.4	11.7	20	60	-	7.44	61
6P54-203	203	226.4	11.7	20	60	-	9.74	61
6P54-254	254	284.0	15.0	20	60	-	15.52	12

Norms: ISO1307