
6P55 10BAR HEAVY DUTY OIL / FUEL DELIVERY

Heavy duty delivery hose for gasoline, diesel, fuel oils with aromatic contents up to 55%, mud, seawater and other general purposes.

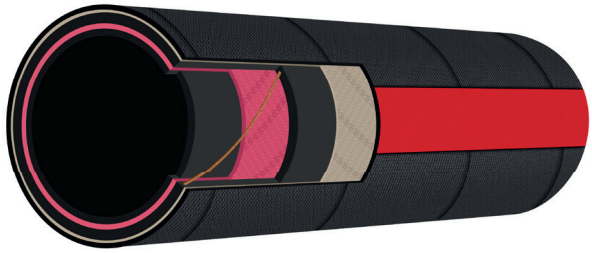

Temperature range:	-30°C +90°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
6P55-025	25	36.6	5.8	10	30	-	0.76	61
6P55-032	32	43.6	5.8	10	30	-	0.93	61
6P55-038	38	49.6	5.8	10	30	-	1.07	61
6P55-051	51	64.4	6.7	10	30	-	1.60	61
6P55-076	76	89.4	6.7	10	30	-	2.29	61
6P55-102	102	115.8	6.9	10	30	-	3.05	61
6P55-127	127	142.0	7.5	10	30	-	4.10	61
6P55-152	152	170.4	9.2	10	30	-	5.98	61
6P55-203	203	223.4	10.2	10	30	-	8.60	61
6P55-254	254	274.4	10.2	10	30	-	10.65	12

Norms: ISO1307