
6P58 16BAR HEAVY DUTY OIL / FUEL DELIVERY

Heavy duty delivery hose for gasoline, diesel, fuel oils with aromatic contents up to 55%, mud, seawater and other general purposes.

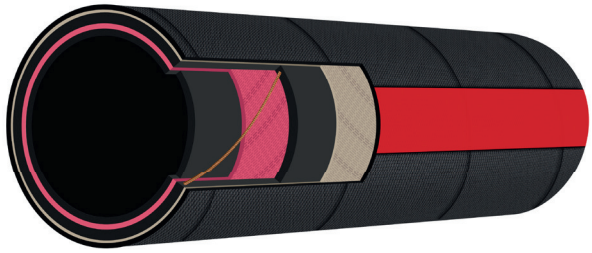

Temperature range:	-30°C +90°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	16 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
6P58-025	25	37.2	6.1	16	48	-	0.79	61
6P58-032	32	44.2	6.1	16	48	-	0.96	61
6P58-038	38	50.2	6.1	16	48	-	1.11	61
6P58-051	51	64.4	6.7	16	48	-	1.60	61
6P58-076	76	89.8	6.9	16	48	-	2.33	61
6P58-102	102	118.8	8.4	16	48	-	3.65	61
6P58-127	127	146.2	9.6	16	48	-	5.18	61
6P58-152	152	171.2	9.6	16	48	-	6.13	61
6P58-203	203	220.0	8.5	16	48	-	7.12	61
6P58-254	254	278.6	12.3	16	48	-	12.69	12

Norms: ISO1307