
L15 15BAR HEAVY DUTY OIL / FUEL DELIVERY.

Heavy duty delivery hose for gasoline, diesel and fuel-oil with aromatic content up to 55%. Seawater, mud and general. Hose made to BS EN1765 standard.

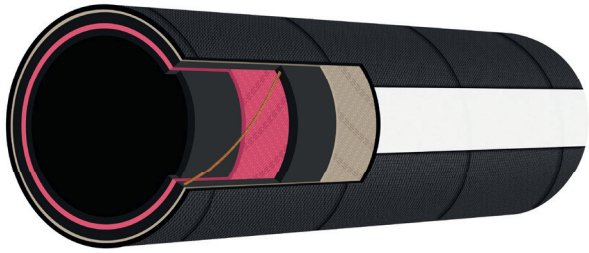

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	15 Bar. 4:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	to BS EN1765
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
L15-051	51	70.4	9.7	15	60	-	2.31	61
L15-076	76	99.6	11.8	15	60	-	4.04	61
L15-102	102	128.0	13.0	15	60	-	5.65	61
L15-152	152	181.4	14.7	15	60	-	9.42	61
L15-203	203	233.2	15.1	15	60	-	12.32	61

Norms: BS EN1765, ISO1307