


S10 10BAR HEAVY DUTY OIL / FUEL DELIVERY.

Heavy duty suction & delivery hose for gasoline, diesel and fuel-oil with aromatic content up to 55%. Seawater, mud and general. Hose made to BS EN1765 standard.

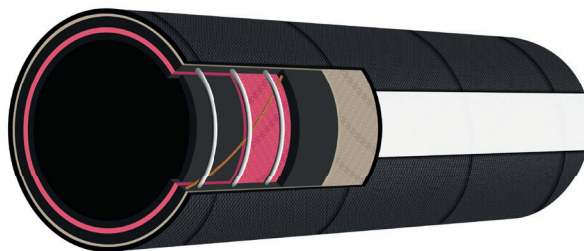

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	to BS EN1765
Ends:	Plain ends.

Options:

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
Nº	mm	mm	mm	bar	bar	mm	kg/m	m
S10-051	51	73.6	11.3	10	40	310	2.93	61
S10-076	76	109.0	16.5	10	40	460	6.20	61
S10-102	102	134.1	16.1	10	40	620	8.26	61
S10-152	152	189.1	18.5	10	40	920	13.92	61
S10-203	203	243.0	20.0	10	40	1220	20.87	61

Norms: BS EN1765, ISO1307