
S15 15BAR HEAVY DUTY OIL / FUEL DELIVERY.

Heavy duty suction & delivery hose for gasoline, diesel and fuel-oil with aromatic content up to 55%. Seawater, mud and general. Hose made to BS EN1765 standard.

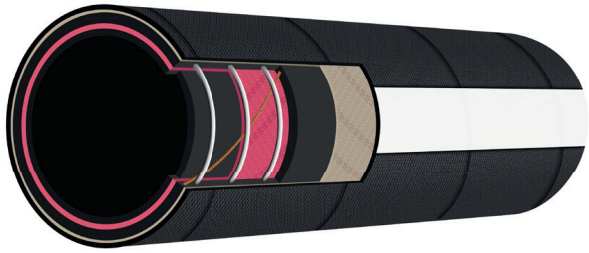

Temperature range:	-30°C +100°C.
Electrical continuity:	Continuous, embedded copper wire R10 6th Ohm M.
Lining:	Black nitrile rubber (NBR) - 55% aromatics.
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	15 Bar. 4:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	to BS EN1765
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
S15-051	51	85.2	17.1	15	60	310	4.84	61
S15-076	76	110.6	17.3	15	60	460	6.80	61
S15-102	102	139.1	18.5	15	60	620	10.04	61
S15-152	152	191.5	19.7	15	60	920	15.13	61
S15-203	203	244.2	20.6	15	60	1220	21.70	61

Norms: BS EN1765, ISO1307