
2W04-C 20BAR SEAWATER SUCTION & DELIVERY HOSE.

Seawater suction & delivery hose.

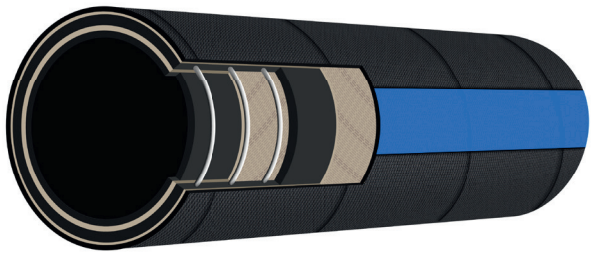

Temperature range:	-30°C +90°C.
Electrical continuity:	N/A.
Lining:	Black chloroprene rubber (CR).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W04-C-032	32	44.5	6.2	20	60	200	1.13	61
2W04-C-038	38	50.9	6.4	20	60	230	1.33	61
2W04-C-051	51	63.9	6.4	20	60	310	1.71	61
2W04-C-063	63	79.4	8.2	20	60	380	2.79	61
2W04-C-076	76	95.6	9.8	20	60	460	3.87	61
2W04-C-102	102	121.7	9.9	20	60	620	5.16	61
2W04-C-127	127	152.7	12.8	20	60	770	9.00	61
2W04-C-152	152	177.7	12.8	20	60	920	10.60	61
2W04-C-203	203	235.8	16.4	20	60	1220	18.36	61
2W04-C-254	254	288.0	17.0	20	60	1530	23.40	12
2W04C-305	305	344.4	19.7	20	60	1830	31.32	12

Norms: ISO1307