
2W04-E 20BAR HOT WATER / MULTIPURPOSE WATER SUCTION & DELIVERY HOSE.

Multipurpose & hot water suction & delivery hose.

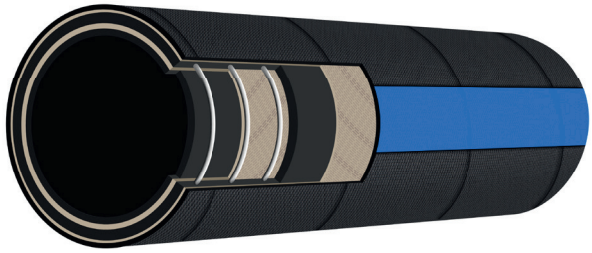

Temperature range:	-30°C +120°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (EPDM).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth synthetic rubber (EPDM). High temperature and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W04-E-032	32	44.5	6.2	20	60	200	1.09	61
2W04-E-038	38	50.9	6.4	20	60	230	1.28	61
2W04-E-051	51	63.9	6.4	20	60	310	1.64	61
2W04-E-063	63	79.4	8.2	20	60	380	2.68	61
2W04-E-076	76	95.6	9.8	20	60	460	3.74	61
2W04-E-102	102	121.7	9.9	20	60	620	5.15	61
2W04-E-127	127	152.7	12.8	20	60	770	8.69	61
2W04-E-152	152	177.7	12.8	20	60	920	10.22	61
2W04-E-203	203	235.8	16.4	20	60	1220	18.25	61
2W04-E-254	254	288.0	17.0	20	60	1530	23.40	12
2W04-E-305	305	344.4	19.7	20	60	1830	30.25	12

Norms: ISO1307