
2W04-S 20BAR HEAVY DUTY WATER SUCTION & DELIVERY HOSE.

Heavy duty water suction & delivery hose.

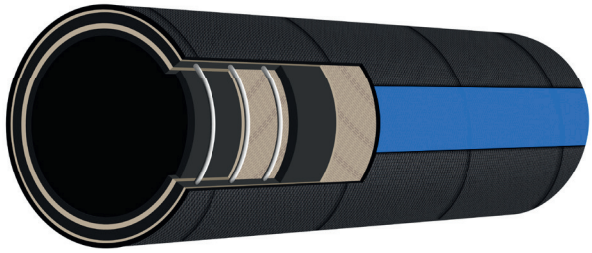

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W04-S-032	32	44.5	6.2	20	60	200	1.23	61
2W04-S-038	38	50.9	6.4	20	60	230	1.45	61
2W04-S-051	51	63.9	6.4	20	60	310	1.86	61
2W04-S-063	63	79.4	8.2	20	60	380	2.98	61
2W04-S-076	76	95.6	9.8	20	60	460	4.10	61
2W04-S-102	102	121.7	9.9	20	60	620	5.47	61
2W04-S-127	127	152.7	12.8	20	60	770	9.38	61
2W04-S-152	152	177.7	12.8	20	60	920	11.05	61
2W04-S-203	203	235.8	16.4	20	60	1220	19.15	61
2W04-S-254	254	288.0	17.0	20	60	1530	24.38	12
2W04-S-305	305	344.4	19.7	20	60	1830	32.79	12

Norms: ISO1307