
2W05-C 10BAR SEAWATER SUCTION & DELIVERY HOSE.

Seawater suction & delivery hose.

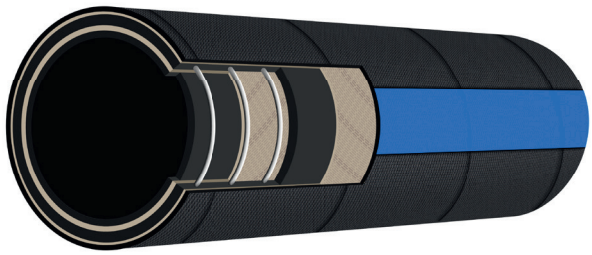

Temperature range:	-30°C +90°C.
Electrical continuity:	N/A.
Lining:	Black chloroprene rubber (CR).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W05-C-032	32	43.9	5.9	10	30	200	1.10	61
2W05-C-038	38	49.9	5.9	10	30	230	1.27	61
2W05-C-051	51	63.5	6.2	10	30	310	1.68	61
2W05-C-063	63	76.8	6.9	10	30	380	2.40	61
2W05-C-076	76	89.8	6.9	10	30	460	2.86	61
2W05-C-102	102	118.7	8.4	10	30	620	4.53	61
2W05-C-127	127	148.9	10.9	10	30	770	8.05	61
2W05-C-152	152	173.9	10.9	10	30	920	9.51	61
2W05-C-203	203	229.8	13.4	10	30	1220	15.81	61
2W05-C-254	254	285.0	15.5	10	30	1530	22.37	12
2W05-C-305	305	339.6	17.3	10	30	1830	28.72	12

Norms: ISO1307