
2W05-E 10BAR HOT WATER / MULTIPURPOSE WATER SUCTION & DELIVERY HOSE.

Multipurpose & hot water suction & delivery hose.

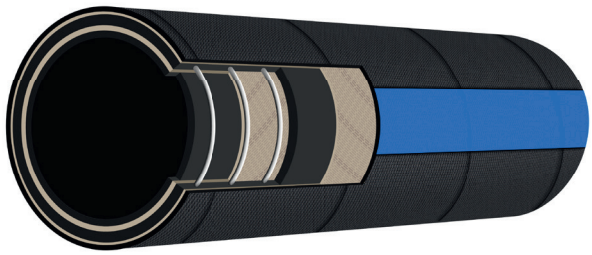

Temperature range:	-30°C +120°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (EPDM).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth synthetic rubber (EPDM). High temperature and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W05-E-032	32	43.9	5.9	10	30	200	1.05	61
2W05-E-038	38	49.9	5.9	10	30	230	1.22	61
2W05-E-051	51	63.5	6.2	10	30	310	1.64	61
2W05-E-063	63	76.8	6.9	10	30	380	2.33	61
2W05-E-076	76	89.8	6.9	10	30	460	2.75	61
2W05-E-102	102	118.7	8.4	10	30	620	4.36	61
2W05-E-127	127	148.9	10.9	10	30	770	7.74	61
2W05-E-152	152	173.9	10.9	10	30	920	9.14	61
2W05-E-203	203	229.8	13.4	10	30	1220	15.21	61
2W05-E-254	254	285.0	15.5	10	30	1530	21.42	12
2W05-E-305	305	323.4	9.2	10	30	1830	16.15	12

Norms: ISO1307